



Abbelight TIRF

For automatic, multicolor and optically perfect TIRF imaging

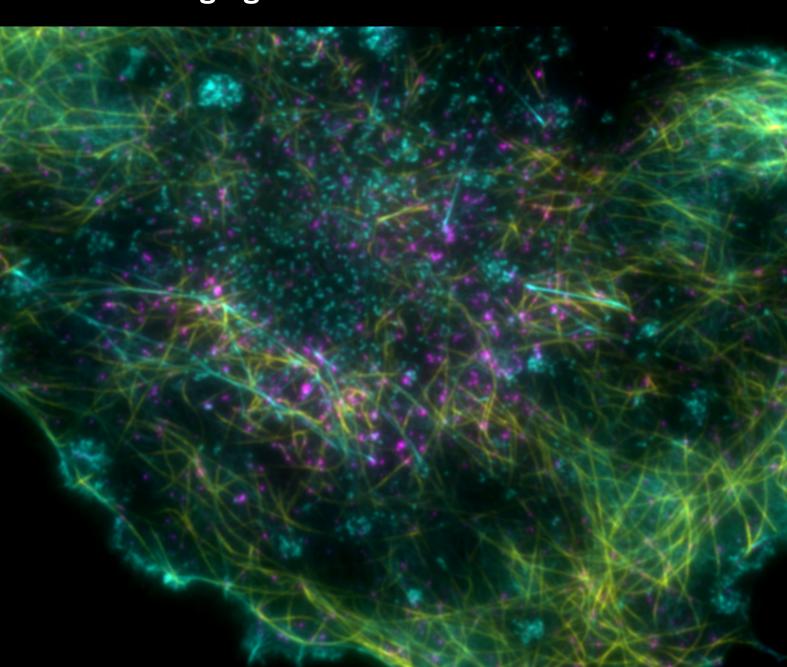

The study of membranes and events close to the coverslip is very much answered in biology research such as cell adhesion, endocytosis, exocytosis or osmosis.

Total Internal Reflection Fluorescence microscopy (TIRF) (Axelrod, 2013) is the most suitable imaging method as it is offering an advantageous optical sectioning (up to a few hundred nanometers after the coverslip. Nevertheless, in practice, TIRF microscope remains quite difficult to preset for non-expert users. It requires perfect optical conjugation of the microscope and very precise positioning of the beam in the Back Focal Plane (BFP) of the objective (Mattheyses et al., 2010), resulting in experiments that are not reproducible from day to day.

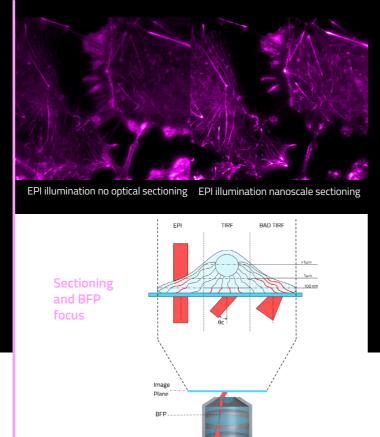

Abbelight's TIRF technology

2


This technology is a hardware and software solution that provides an **optically perfect** TIRF imaging. Adaptable on any combination of microscopes, objectives, XYZ stages and accessories, our new product guarantees the automatically calibrated and reproducible positionned TIRF angles. Coupled with a detection optical module, it offers an optimal and simultaneous multicolor imaging with the benefits of **ASTER** technology. This technology provides an ultra-widefield and speckle-free **illumination** of biological structures close to the coverslip such as membranes, focal adhesions, and much more.

Features and advantages

- Adaptable technology to any inverted microscope
- The largest uniform and speckle-free field of view on the market thanks to Abbelight ASTER illumination strategy
- Automatic, quantitative and reproducible **TIRF** to define the optimal position of the TIRF angles and get reliable data over time, whatever your sample is
- Chromatic aberration-free multicolor TIRF **imaging** which allows you to image several structures on your samples simultaneously
- Multi-dimensional acquisition with multiple scenarios, having options designed to best meet the needs of TIRF applications


Adaptable


The optical system installed in Abbelight SAFe excitation device is designed to obtain the optimal TIRF angle position and get the perfect TIRF illumination compatible with any combination of:

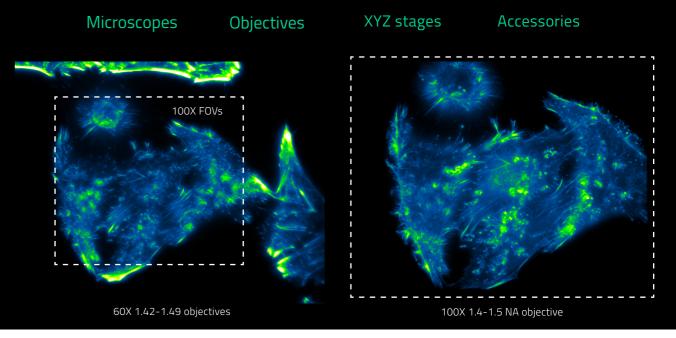

EPI Illumination

IMAGE PLANE






Beam NOT perfectly focused on BFP No difference in EPI


With **Abbelight** SAFe technology

Without

Abbelight SAFe

technology






Beam perfectly focused on BFP. No difference in EPI

TIRF Illumination


IMAGE PLANE


BACK FOCAL PLANE





Beam NOT perfectly focused on BFP. TIRF not available





3

Beam perfectly focused on BFP. **Perfect TIRF**

FOR AUTOMATIC, MULTICOLOR AND OPTICALLY PERFECT TIRF IMAGING Abbelight TIRF

Very large and uniform FOV

Abbelight patented ASTER method offers homogeneous TIRF illumination of the sample over the largest FOV on the market.

Simultaneous 2C

150 x 150 µm²

Simultaneous 4C

250 x 250 μm²

60X

170 x 250 μm² 100 x 100 μm²


Blue F-Actin-AF488 - Green Tub-AF568 - Red Clathrin-AF647

Abbelight's ASTER illumination


ASTER TIRF illumination, co-developed with Sandrine Lévêque-Fort and published in Nature Communication (A. Mau et al., 2021), outperforms standard TIRF strategy because it breaks classical interference fringes like the Ring/Azimuthal TIRF method.

ASTER TIRF illumination also surpasses Ring/Azimuthal method because it is offering a >95% uniform excitation over the largest FOV, while Ring/Azimuthal TIRF is strongly limited by the gaussian shape of the laser irradiance.

STANDARD TIRF




Interference fringes issues




No fringes offering reliable image

RING/AZIMUTAL TIRF



Gaussian illumination leading to non uniform excitation


ASTER TIRE



> 95% excitation uniformity over the whole FOV

Automatic, quantitative and reproducible

Our technology combined with a software application and a calibration sample allows automatic definition of the TIRF angles with <1.2% error, leading to reliable data over time.

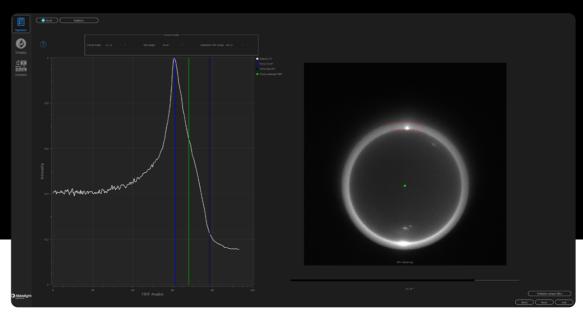

Visualization of the results of calibration: The algorithm uses the two planes (BFP/Image plane) to calculate the **critical angle**, **maximum angle** and an **optimized TIRF**


- Software application integrated into Abbelight™ SAFe NEO aids in calculation and backup of TIRF angles based on image processing algorithm, that exploits image plane intensity as well as distribution and segmentation of your objective's BFP
- Calibration sample based on nanometric beads embedded into a highly controlled and long life-time gel with refractive index of water. The calibration sample is supplied with our Support Program Abbelight Care 1
- Ultra stable TIRF stage based on a closed-loop long range piezo stage offering nanoscale repositionning of the beam at BFP



4 Abbelight TIRF FOR AUTOMATIC, MULTICOLOR AND OPTICALLY PERFECT TIRF IMAGING 5

Reliable Multicolor imaging

A robust optical design and software architecture leads to highly stable, multicolor imaging without chromatic aberration, optical artefact or misalignment over time.

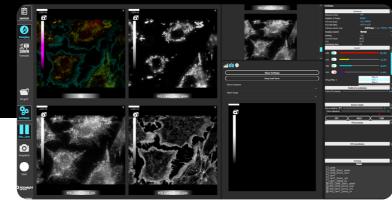


Multi-view imaging page of Abbelight NEO Safe softwate suite.


Abbelight's multicolor strategy

Optics inside the illumination device are designed to reduce drastically chromatic aberration for the range 488-640 nm, thus offering TIRF excitation over a wide spectrum.

Special **custom dichroic CUBES** have been designed to remove ghost images and also to reduce crosstalk between channels, thus offering up to 4 colors simultaneous imaging.

Highly stable optomechanical components holding dichroic cubes have been carefully chosen to simplify the alignment of the 4 colors images. A software digital alignment tool has also been developed to offer < 0,7 pixel precision of alignment.

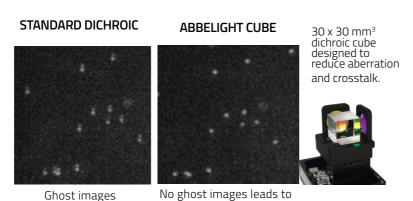

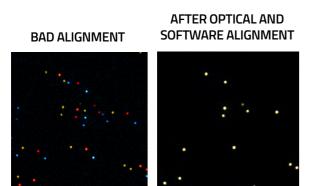

Localizations-CamT_Zone2_Adjusted Precision < 0,7 pixel Bead position differences in pixels

Abbelight TIRF

reliable data

Multi-dimensional acquisition for TIRF and multicolor imaging


Multiple acquisition scenarios with adjustable parameters developed to best meet the needs of TIRF applications




Time lapse multicolor imaging

Variable angle TIRF multicolor


Multi-position multicolor imaging

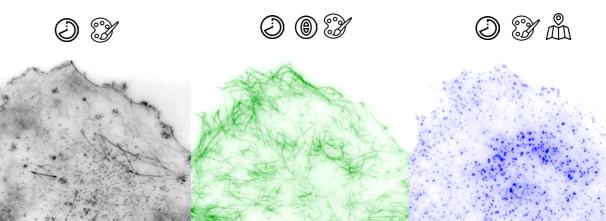

Abbelight SAFe modular platform* for microscopy and super-resolution

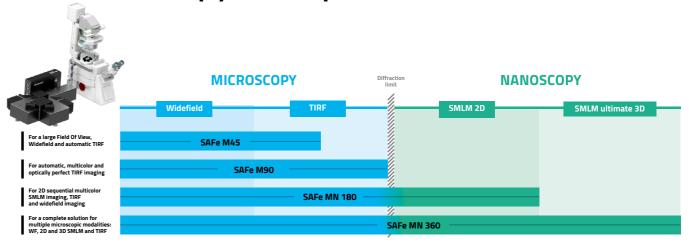



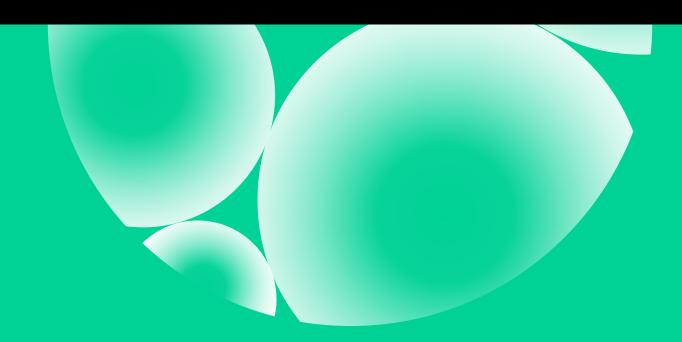

contact@abbelight.com

191 avenue Aristide Briand 94230 Cachan - France

© Abbelight 2023. All rights reserved. NOW, WE SEE and other trademarks and registered trademarks are the property of Abbelight. The names of actual companies and products mentioned herein may be the trademarks of their respective owners.

